




Cassette contenitrici di comandi, uno posto sul frontale ed eventuale secondo comando posto sul lato inferiore.

Pressofuse in alluminio (per lega vedi informazioni tecniche generali nelle ultime pagine del presente catalogo), successivamente sabbiate o verniciate. Queste cassette sono particolarmente adatte per essere applicate in verticale su pali a sezione ottagonale o su pali tondi da Ø 102 e 200 mm. Il fissaggio al palo avviene tramite viti passanti, poste internamente alla cassetta e protette da guarnizione interposta tra la scatola e la superficie d'appoggio. Alcuni modelli sono dotati di pulsante assemblato in fabbrica, con attuatore VERDE a raso ghiera e contatto normalmente aperto (10 A – 250 V~). Il pulsante posto sul coperchio è protetto da un bordino di sicurezza. Una vite interna per la messa a terra anche del coperchio. Le viti del coperchio sono in acciaio inox (per viti antimanomissione vedi accessori). Guarnizioni in mouse al neoprene (altre a richiesta). Grado di protezione IP 65 (realizzato a contenitori completi). Temperature d'impiego - 20° +100°C.

Enclosures for controls, placed one on the front and a second one on the lower side.

Aluminium die-cast (for alloy see general technical information in the last pages of this catalogue), then sand-blasted or varnished. These enclosures are particularly suitable to be installed vertically on octagonal or round poles (Ø 102 and 200 mm). They are fastened to the pole by through screws placed inside the enclosure and protected by a gasket laying between the enclosure and the supporting surface. Some items are equipped with a preassembled push button and a GREEN actuator at the same level of the ring nut, which is usually open contact (10 A – 250 V~). The push button placed on the cover is protected by a safety band. Internal cover grounding screw. Stainless steel cover screws (see fittings for unscrewable screws). Neoprene mouse gaskets (others available on request). Protection degree IP 65 (complete enclosures). Temperature of use - 20° +100°C.

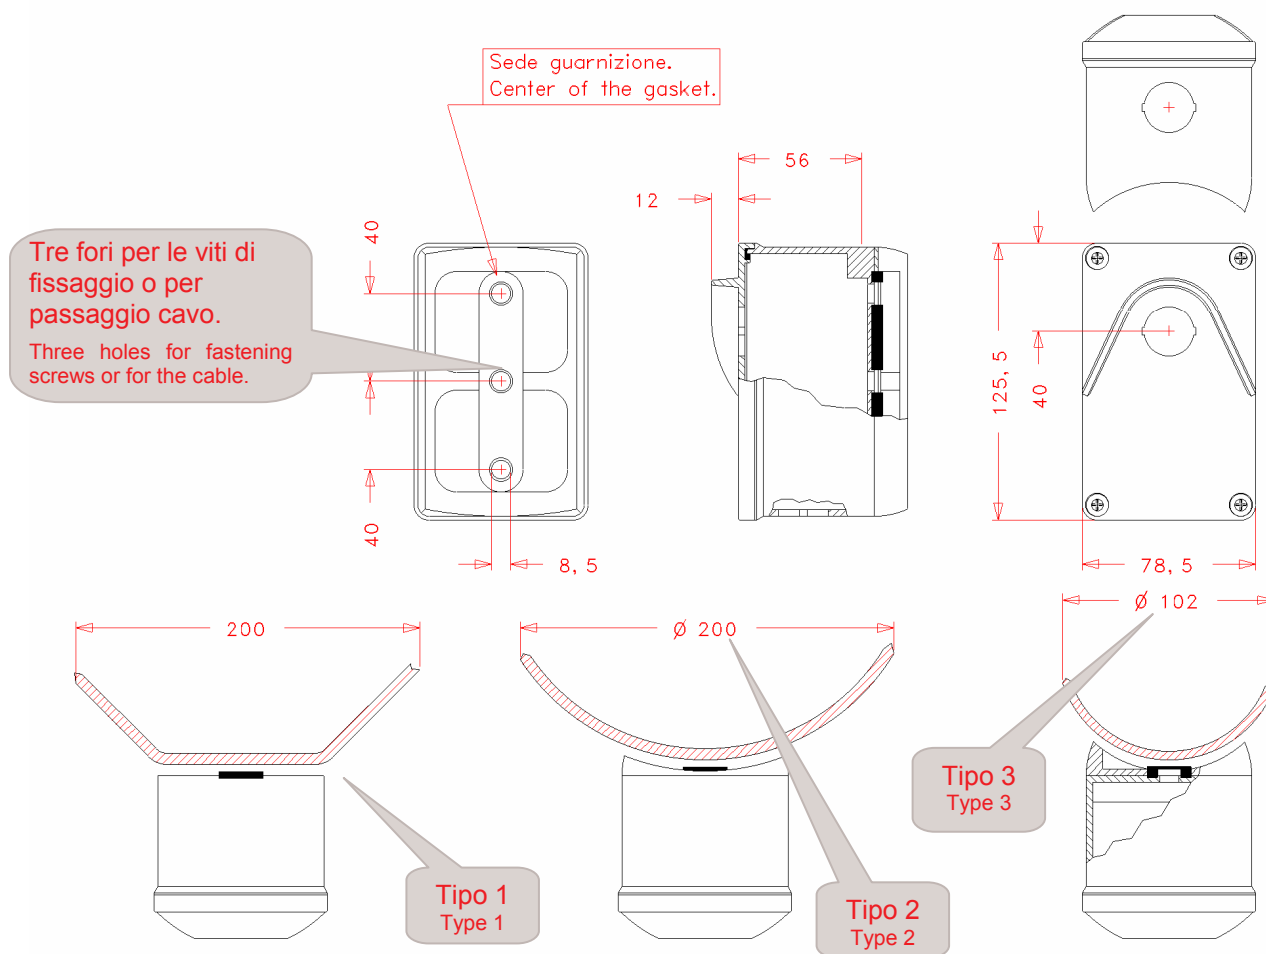

Codice (tipo 1) Per palo con sez. ottagonale.	Codice (tipo 2) Per palo con diametro 200 mm.	Codice (tipo 3) Per palo con diametro 102 mm.	n° fori	Finitura
Code (type 1) For octagonal pole	Code (type 2) For 200 mm diameter round pole	Code (type 3) For 102 mm diameter round pole	No holes	Finishing
G120AS1	G120AS2	G120AS3	1	Sabbiata Sandblasted
G120AS1Y	G120AS2Y	G120AS3Y	1	Coperchio giallo RAL 1023 Corpo sabbiato (naturale) Yellow cover RAL 1023 Sandblasted body.
G120AS1C	G120AS2C	G120AS3C	►►	Sabbiata Sandblasted
G120AS1YC	G120AS2YC	G120AS3YC	►►	Coperchio giallo RAL 1023 Corpo sabbiato (naturale) Yellow cover RAL 1023 Sandblasted body.
G120BS1	G120BS2	G120BS3	1+1	Sabbiata Sandblasted
G120BS1Y	G120BS2Y	G120BS3Y	1+1	Coperchio giallo RAL 1023 Corpo sabbiato (naturale) Yellow cover RAL 1023 Sandblasted body.



Completa di un pulsante con attuatore VERDE a raso ghiera (contatto NO – 10 A – 250 V ~).

Provided with push button and GREEN actuator at the same level of the ring nut (contact NO – 10 A – 250 V ~).